

30 SERIAL GEAR PUMP
UNI


XXX BI-ROTATIONAL XXX XX

PUMP TYPE


DISPLACEMENT

ROTATION

FLOW

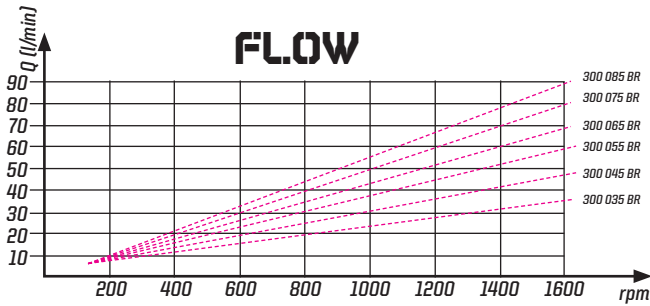


DRIVE TORQUE

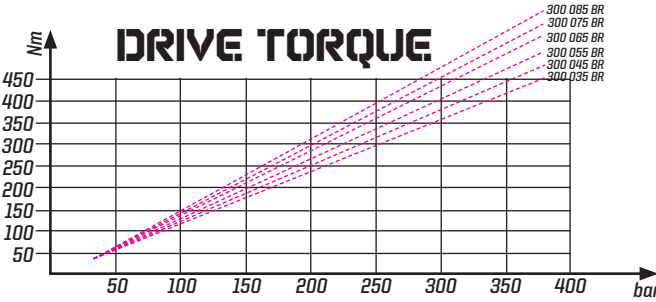

Fluid Temp. °C	Input Pres. Bar	Optimale K. Viscosity	Oil Filtering
0 / 100	0,3 / 1,7 bar	10 / 100 CST	> 200 bar : 25 um <200 bar : 35 um


BI-ROTATIONAL PUMP



NOTE : THE ABOVE SPECIFICATIONS REFER TO OIL TYPE ISO VG 46 AT 50°

NOTE : SEE TECHNICAL PAGE TO CHANGE THE DIRECTION OF ROTATION

USED PLACED :
DUMPER TRUCKS
PRIVATE AIM WINCHES
TRACTOR LADLES

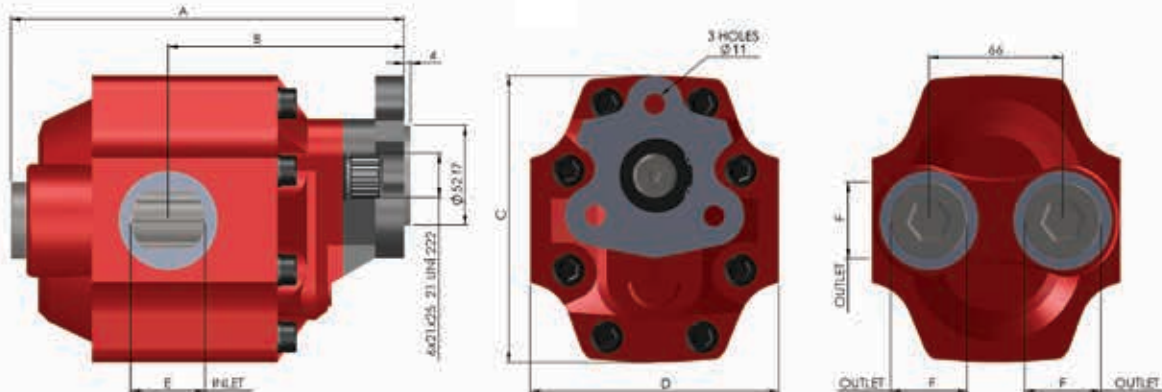

Code	Displacement cm ³ /1000	Rotation	Working Pressure	A mm	B mm	C mm	D mm	E Inlet	F Outlet	Weight
300 035 BR	35	BI-ROTATIONAL	245	203	122	149	128	1" 1/4 G	1" 1/4 G	12.5
300 045 BR	45	BI-ROTATIONAL	260							
300 045 BR	55	BI-ROTATIONAL	270							
300 065 BR	65	BI-ROTATIONAL	245							
300 075 BR	75	BI-ROTATIONAL	220							
300 085 BR	85	BI-ROTATIONAL	220							